
# Lyn-FLOOR · LED floor

A walk-on screen that carries the show.

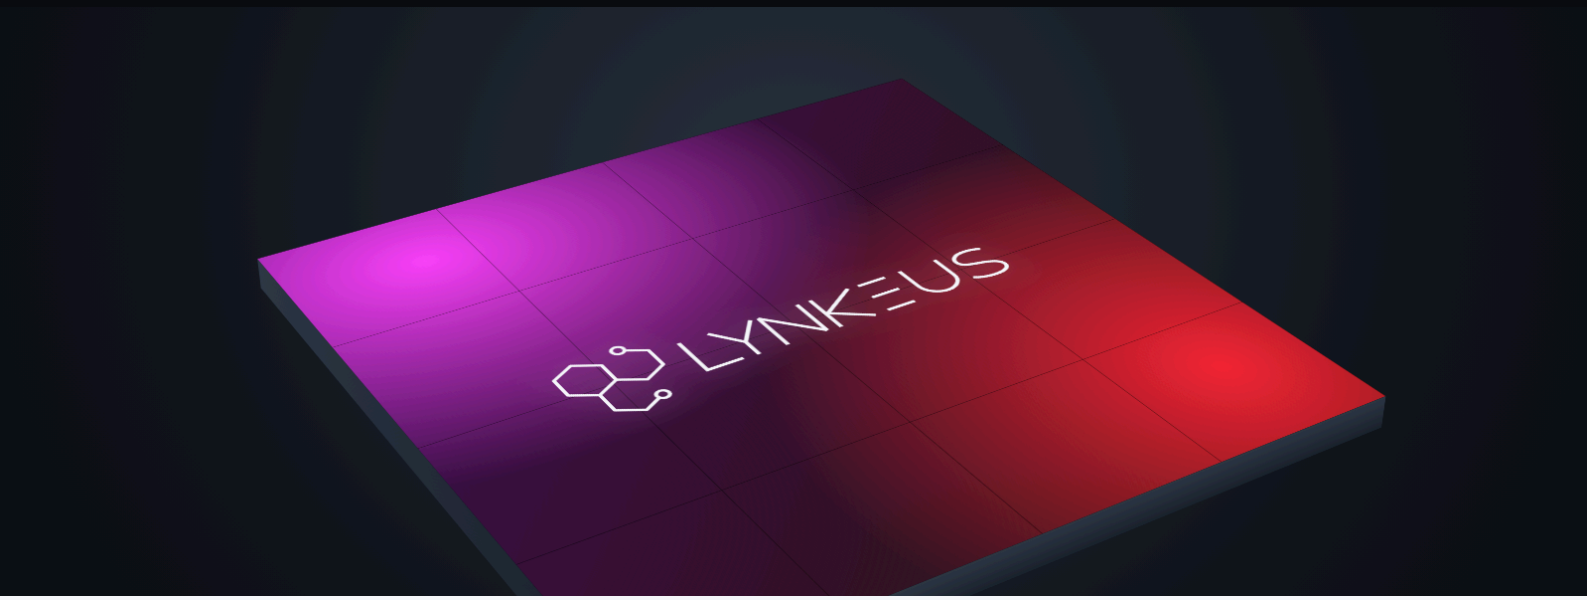


## OVERVIEW

Floor tiles rated for 2,500 kg per square metre with a matte, anti-slip surface. Optional sensors make the floor react to footsteps.

## HIGHLIGHTS

- Rated load 2,500 kg per square metre
- Matte anti-slip surface
- Optional interactive sensing
- Front service from above

## WHERE IT FITS

- Stage floors
- Exhibitions
- Interactive dance floors
- XR studios

## MODELS

Lyn-FLOOR-2.5 | Lyn-FLOOR-4.8

## SPECIFICATIONS

| | |
|---|---|
| Technology | SMD (GOB option at 2.5 mm) |
| Environment | Indoor / outdoor |
| Pixel pitch | 2.5, 4.8 mm |
| Cabinet size | 500 x 500 mm, 80 to 92 mm deep |
| Weight | 12 or 16 kg per cabinet |
| Brightness | 1,000 to 1,500 nits |
| Refresh rate | 7,680 Hz (3,840 Hz on one model) |
| Protection | IP65 front / IP54 rear |
| Service access | Front |

Specifications are indicative and may change without notice. Confirm against the current datasheet before ordering. Product images are illustrations. Model names give the nominal pixel pitch in millimetres. © Lynkeus